



THK PART SPECIFICATIONS SHEET

THK P/N: 011-JT-S316



PART DESCRIPTION: 13/16" x 1-5/8" STRUT CHANNEL W/"J" TEETH, 1/2 SLOTS, 316 STAINLESS STEEL

PRIMARY APPLICATION: _MOST STRUT APPLICATIONS. "J" TEETH ARE IDEAL FOR SUPERIOR GRIP TO PREVENT SLIPPING IMPROVING BOND AT FASTENER/FITTING ATTACHMENTS USED IN HIGHLY CORROSIVE APPLICATIONS, SUCH AS CHEMICAL, PHARMACY, FOOD SERVICE, MARINE, LABORATORY, TO NAME A FEW APPLICATIONS

REV LEVEL: REL

REV DATE: JAN-2011

DATE RELEASED INTO SYSTEM: JAN-2011

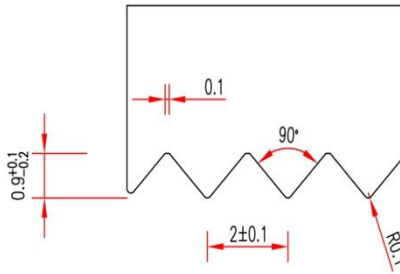

SPECIAL "J" TEETH SERRATIONS FOR SUPERIOR GRIPPING FORCE, IDEAL FOR VERTICAL CHANNELS REQUIRING VERY SECURE COLUMN BEARING LOAD ATTACHMENTS

MATERIAL: STAINLESS STEEL 316, CONFIRMS TO ASTM A-240, COLD ROLL, BEST USED INSTEAD OF 304 STAINLESS IF METAL IS USED IN FOOD PROCESSING, CHEMICAL, LABORATORY, PHARMACEUTICAL, OIL REFINING, MARINE, MINING, PAPER OR COLD STORAGE APPLICATIONS. OTHER GRADES OF STAINLESS MAY BE MORE IDEAL FOR YOUR APPLICATION, SO PLEASE CONSULT AN EXPERT TO BE SURE YOU HAVE MADE THE BEST CHOICE FOR THE GRADE OF STAINLESS STEEL YOU PURCHASE.

- **OFFERS SUPERIOR CORROSION AND OXIDATION RESISTANCE, GOOD MECHANICAL PROPERTIES FOR FABRICATION/WELDING/MACHINING**

THICKNESS: 14-GAUGE

SURFACE FINISH: PLAIN

SLOT SIZES: 9/16" X 1-1/8" ON 2" CENTERS

SPECIAL ORDER (PRICING AND DELIVERY- AVAILABLE UPON REQUEST)

- **➤ STAINLESS STEEL (OTHER ALLOYS BEST SUITED FOR YOU)**
- **➤ PAINTED TO CUSTOMER SPECIFICATIONS**
- **➤ CUSTOMER DESIGNED PARTS – ENCOURAGED**
- **➤ MATERIAL CERTIFICATIONS FROM STEEL MILL**

