


THK-10600-10

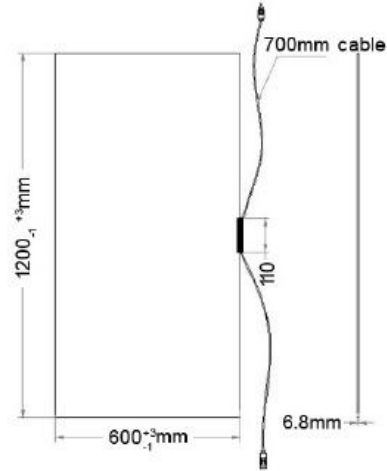

Electrical Specifications (performance at STC: 1000W/m², 25°C, AM1.5)

Nominal Power(P _m)	72W
Open Circuit Voltage(V _{oc})	116V
Short Circuit Current (I _{sc})	0.88A
Voltage at max. Power(V _m)	87V
Current at max. Power(I _m)	0.82A
Transmission ✕ (Transmission can be customized)	0.1

System Properties (at STC)

Maximum System Voltage	V _{SYS} (V)	1000(600UL)
Limiting Reverse Current	I _R (A)	2
Maximum Series Fuse	I _{CF} (A)	2

Temperature Coefficients (at STC)

Temperature Coefficients of I _{sc}	α=0.060%/°C
Temperature Coefficients of V _{oc}	β=-0.321%/°C
Temperature Coefficients of P _m	γ=-0.214%/°C

Mechanical Specifications

Length	1210mm
Width	600mm
Thickness	6.8mm
Area	0.72m ²
Weight	11.8kg



Frame	None
Lead Cable	2.5mm ² , 700mm
Connectors	MC4
Bypass Diode	10A
Cell Type	Cadmium Telluride (CdTe)
Cover Type	3.2+0.76EVA/PVB+3.2mm
Back Glass	Tempered/Tinted/UV reduction
Encapsulation	EVA/PVB

WARRANTY:

- 10 years materials and workmanship.
- 25 years power output guarantee for 90% of nominal output during first 10 years and 80% over 25 years.
- Modules are life cycle managed with a collection and recycling program, providing module owners with no cost, end-of-life take back, and recycling of the modules.